

KSM44A Multi-Pattern Large Dual-Diaphragm Side-Address Condenser Microphone

Overview


KSM44A: A premium, large-diaphragm, side-address condenser microphone with multiple polar pattern options (cardioid, omnidirectional, bidirectional). The refined and sophisticated design of the KSM44A features an externally biased, dual 1-inch diaphragms, extensive internal pop filtering and Prethos™ Advanced Preamplifier Technology for a ground-breaking threshold minimum of self-noise. The KSM44A is the premier choice for the highest level of professional studio and stage performance.

Specifications

Cartridge Type	Condenser (externally biased)
Polar Pattern	Cardioid, Omnidirectional, Bidirectional
Frequency Response	20 to 20,000 Hz
Output Impedance	50 ohms
Attenuator Switch	15 dB
Low-Frequency Filter Switch	Flat, -6 dB/octave below 115 Hz, or -18 dB/octave below 80 H
Power Requirements	11-52 V DC phantom power (IEC-61938) 5.8 mA, maximum
Common Mode Rejection (10 to 100,000 Hz)	> 50 dB
Common Mode Rejection (20 Hz to 20 kHz)	> 50 dB
Polarity	Positive pressure on diaphragm produces positive voltage on pin 2 with respect to pin 3
Net Weight	492 g (17.4 oz.)
Connector	Three-pin professional audio (XLR), male, balanced
Features	<ul style="list-style-type: none"> • A milestone technical achievement, Shure's Prethos™ Advanced Preamplifier Technology provides 4dB of self-noise and max SPL of 131 dB for a total dynamic range of 127 dB – an increase of 7 dB that defines the new standard for cleanly nuanced audio capture • Multiple polar patterns—cardioid, omnidirectional and bidirectional—for maximum flexibility in a wide variety of recording applications • Dual 1 inch, externally biased, ultra-thin, 2.5 µm, 24 Karat gold-layered, low mass diaphragms provide superior transient response • Class A, discrete, transformerless preamplifier for transparency, extremely wide frequency response and no crossover distortion. Minimizes harmonic and intermodulation distortions. Premium electronic components and gold-plated internal and external connectors • Subsonic filter eliminates rumble from mechanical vibration below 17 Hz. • Switchable 15 dB pad for handling extremely high sound pressure levels (SPLs) • 3-position switchable low-frequency filter helps reduce unwanted stand vibration noise or counteract proximity effect • Integrated three-stage "pop" protection grille reduces plosives and other breath noise



KSM44A Large Diaphragm Multi-Pattern Condenser Microphone



KSM44A Microphone Front

Available Models

KSM44A/SL	Includes ShureLock® Suspension Shock Mount, ShureLock® Stand Mount, Carrying Case, and Velveteen Pouch
------------------	--

Accessories and Replacement Parts

A44AM	ShureLock® Stand Mount
RK383	Suspension Shock Mount Elastic Cord, Cristal (contains two)
A44ASC	Aluminium Carrying Case
A44AVB	Protective Velveteen Pouch
A44ASM	ShureLock® Elastic Shock Mount




	Cardioid	Omnidirectional	Bidirectional
Sensitivity (open circuit voltage, at 1 kHz typical)	-31 dBV/Pa (29.8 mV)	-37 dBV/Pa (14.8 mV)	-36 dBV/Pa (16.8 mV)
Self Noise (equivalent SPLA weighted, typical)	4 dB SPL -A	6 dB SPL -A	7.5 dB SPL -A
Preamplifier Distortion Störgeräusch (at 1 kHz, 94 dB SPL)	< 0.001 %	< 0.001 %	< 0.001 %
Signal-to-Noise Ratio	90 dB	88 dB	86.5 dB
Clipping Level (20 Hz - 20 kHz, 1 % THD)	9 dBV	9 dBV	9 dBV
Dynamic Range	130 dB	134 dB	131 dB
Maximum SPL (Pad Off)	134 dB SPL	140 dB SPL	139 dB SPL

SHURE[®]
LEGENDARY
PERFORMANCE™




KSM44A Multi-Pattern Large Dual-Diaphragm Side-Address Condenser Microphone

Polar Pattern & Frequency Response




Omnidirectional

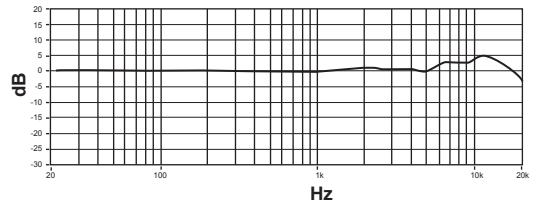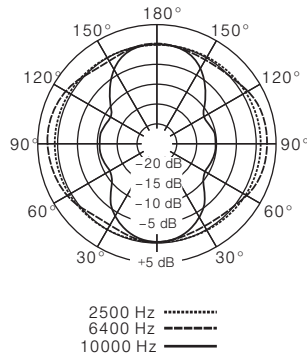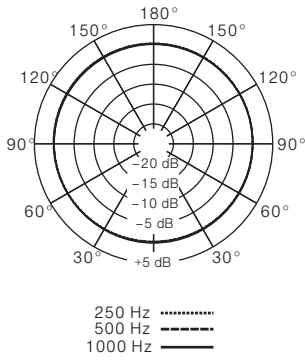

Cardioid

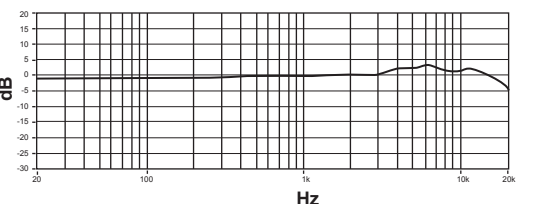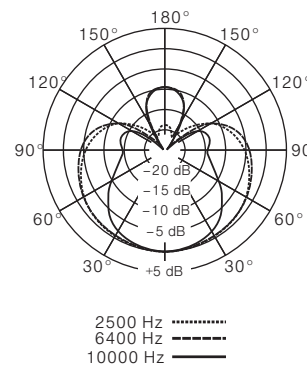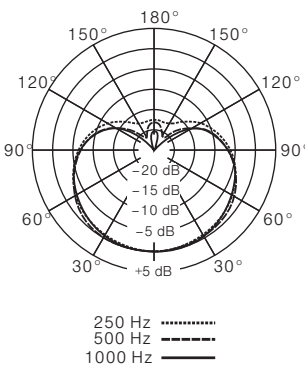

Bidirectional

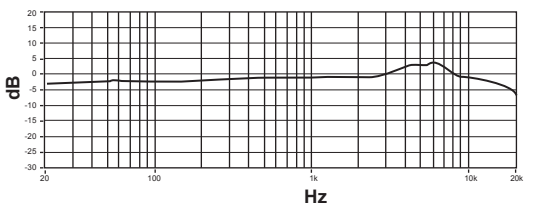

www.shure.eu



QUALITY CAN NOT BE COPIED
SHURE AGAINST COUNTERFEITING

© 2010 Shure Europe GmbH

07/2010

Whilst every effort has been made to ensure that the information in this document is correct, we accept no liability in respect of errors or omissions. All specifications within this document are subject to change without notice.